



Hot dip galvanised heavy coatings \geq Z450


Taking heavy coating one step further

Galvanised heavy coating by ArcelorMittal, aims to provide lasting corrosion resistance in the toughest environments.

With its state-of-the-art technology, ArcelorMittal is the first steel company in Europe to measure coating thickness to the smallest deviation. This ensures precision and homogeneity throughout the coated coil.

Unmatched accuracy in thickness measurements allow you to make more reliable lifetime calculations for your steel solutions.

When it comes to long lasting reliability, you cannot afford weak links...

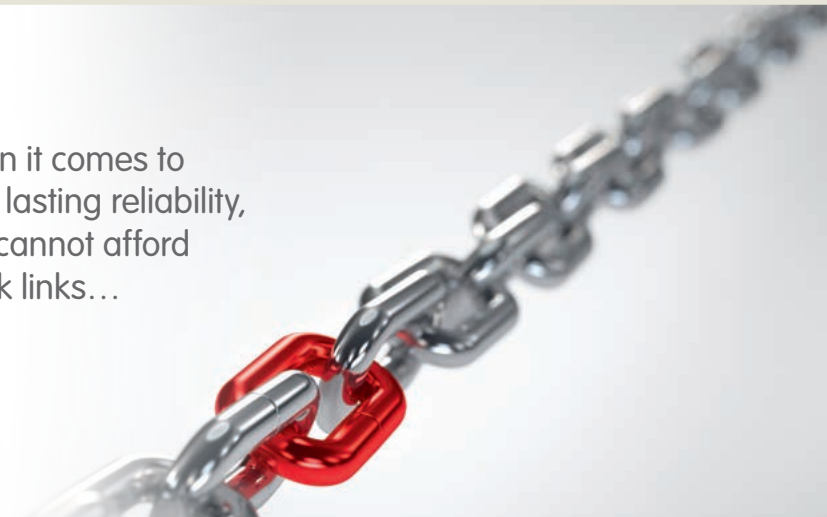

- High precision on processed parts
- Improved corrosion resistance
- Long-lasting surface aspect
- Very good mechanical properties
- Suitable for grain storage

ArcelorMittal has made your heavy coatings more reliable than ever.

Tested, trusted, applied and appreciated... by our customers

"We have been using hot dip pre-galvanised Z725 for more than 20 years to make underground culverts and rainwater tanks. It meets our expectations regarding processing, profiling and workability operations and its long life-time complies with French public regulations for the drainage industry."

Daniel Francesconi, CEO Tubosider France


"Our customers prefer ArcelorMittal's heavy-coated Z450 or Z600 for its long life-time, its excellent surface aspect which blends in with the cereal storage environment, and its competitive quality/price ratio."

Jean-Michel Privé, CEO Privé SA, France



ArcelorMittal offers the widest product range,
and is well positioned to deliver with short lead times in and around Europe.

Dimensional feasibility

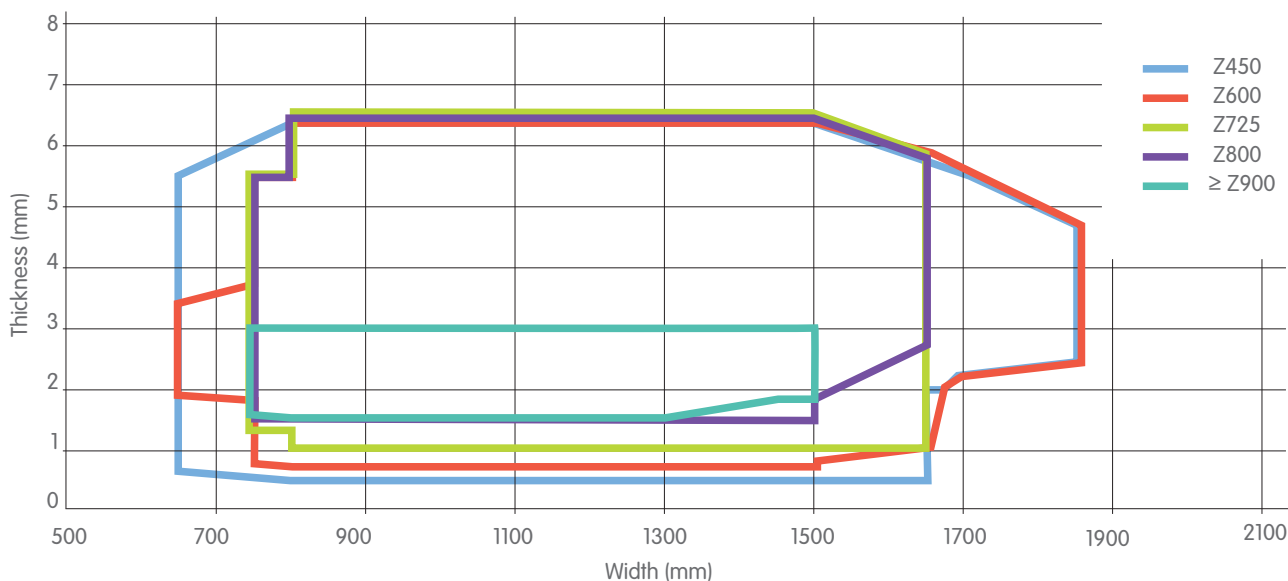

From drawing grades to structural steels,
we offer a comprehensive choice of grades.

Steel grades	DX51D-DX56D	Acc. to EN 10346
	S220GD up to S550GD	Acc. to EN 10346
	HX260LAD-HX500LAD	Acc. to EN 10346
Surface aspect	A	Standard finish
	B	Improved finish
Protection	E-passivation	Chemical passivation
	O	Oiling

Established corrosion performance
in all environments

Coating	Corrosivity category (ISO 9223)			
	C3	C4	C5	CX
Z450	10-20	5-10	2-5	-
Z600	>20	10-20	5-10	2-5
Z725	>20	10-20	5-10	2-5
Z800	>25	10-25	5-10	2-5
≥ Z900	>25	15-30	5-15	2-5

Lifetime to first maintenance in years,
based on calculations according to EN ISO 14713-1:2017

Any questions ?

Ask them via our contact form on
industry.arcelormittal.com/getintouch

“Measuring coating thickness
to the smallest deviation
to ensure precision and homogeneity
throughout the coated coil.”



ArcelorMittal Europe – Flat Products

24-26, boulevard d’Avranches
L-1160 Luxembourg
industry.arcelormittal.com

Credits

Images: Tubosider SA, Privé S.A,
Papean Artiom, Jarous – Shutterstock.com

Copyright

All rights reserved for all countries. This publication shall not be reproduced, in whole or in part, in any form or by any means whatsoever, without prior express written consent from ArcelorMittal. Care has been taken to ensure that the information in this publication is accurate, but this information is not contractually binding. ArcelorMittal and any other ArcelorMittal Group company do not therefore accept any liability for errors or omissions or any information that is found to be misleading. As this document may be subject to change at any time, please consult the latest information in the product document centre at industry.arcelormittal.com.